




Thermal Imager KT-128

index: WMGBKT128

-  IP54
-  LASER POINTER
-  VISUAL CAMERA

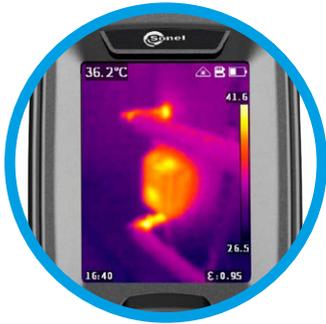

2.4" display

Clear temperature reading



Large buttons

Conveniently located for flawless control



Trigger

Temperature measurement with a single press



Feel safe with thermography

Simple thermography


KT-128 is a special camera. Economical, practical and handy, it is a powerful tool in everyday work.

The camera is used for basic diagnostics. It is equipped with a matrix having a resolution of 120 x 90 pixels, supported by visual camera, laser pointer and additional features to fully meet the needs of users.

Application

KT-128 is used always when the temperature of objects is important and may affect the operation of the equipment. Particularly useful in:

- power engineering,
- construction sector,
- industry
- HVAC.

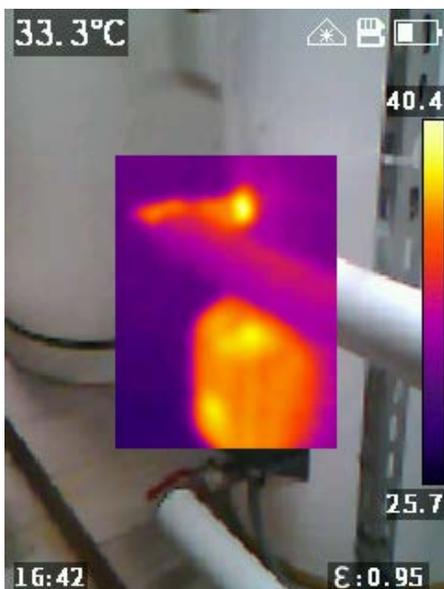

Features

- measuring range -20°C...400°C
- quick start
- fast temperature measurement
- automatic signalling of exceeded alarm threshold
- saving IR images to SD card
- built-in Li-Ion battery with 5-hour working time
- interfaces: microUSB 2.0 type C, SD slot
- can be set up on a tripod

Specifications

Detector resolution	120 x 90 / 17 μ m
Detector	7.5~14 μ m
Frame rate	25 Hz
Sensitivity	60 mK
Lens (field of vision / focal distance)	50° x 38°/2.28 mm
Spatial resolution (IFOV)	7.6 mrad
Display	2.4", 240 x 320, LCD
Image mode	IR / Visual / PiP
Temperature range	Range 1: -20°C...+150°C Range 2: 100°C...+400°C
Accuracy	$\pm 2^\circ\text{C}$ or $\pm 2\%$ of reading (for ambient temperature 15°C...30°C, object temp. $\geq 0^\circ\text{C}$)
Image analysis mode	Point. 3 areas. Temperature indication: min, max. Temp. alarm
Palettes	6
Emissivity	Selectable from 0.01 to 1.00 or from the list
Measurement adjustment	Adjustable distance, ambient temperature (reflected)
Image file format	JPG
Built-in features	Visual camera 5 MPix, LED flashlight, laser pointer
Interfaces	microSD card slot (max. 32 GB), microUSB 2.0 type C, tripod
Power supply	Li-Ion battery (operating time >5 hours), built-in charger (charging time <2.5 hour), AC adapter 110-230 V, 50/60 Hz
Operating temperature	-10°C...+50°C
Storage temperature	-40°C...+70°C
Housing	IP54
Weight	ca. 0.35 kg

Standard accessories

USB charger	WAZASZ20
Type C microUSB cable	WAPRZUSBC
16 GB microSD card	WAPOZMSD16
Wristband	WAPOZPAS1